


OPTICAL FIBER Materials
Manufacturing-II

Fiber Structure

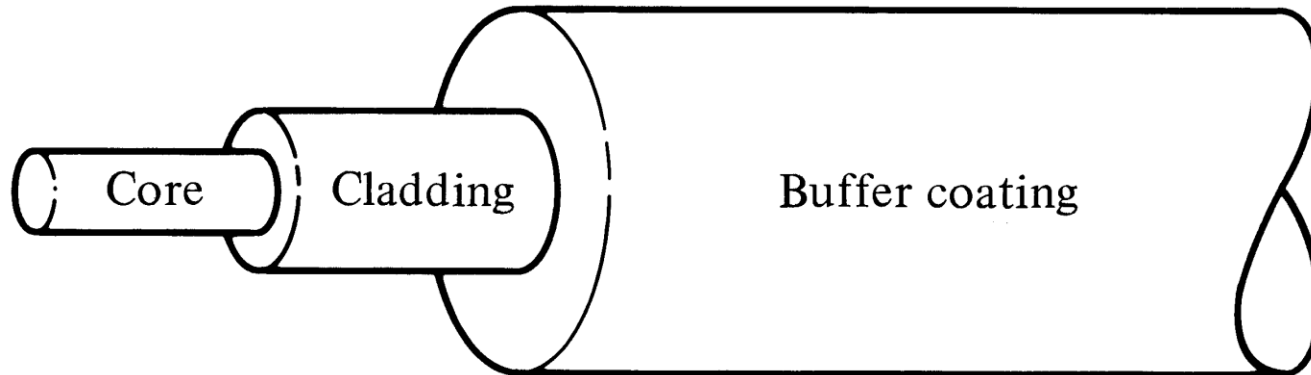


- An optical fiber is a long cylindrical dielectric waveguide, usually of circular cross-section, transparent to light over the operating wavelength.
- A single solid dielectric of two concentric layers. The inner layer known as **Core** is of radius '**a**' and refractive index ' **n_1** '. The outer layer called **Cladding** has refractive index ' **n_2** '.

$$n_2 < n_1 \rightarrow \text{condition necessary for TIR}$$

Schematic of Vapour-Phase Deposition Techniques


- For Silica rich glasses
- ✓ High transparency
- ✓ Optimum optical properties.

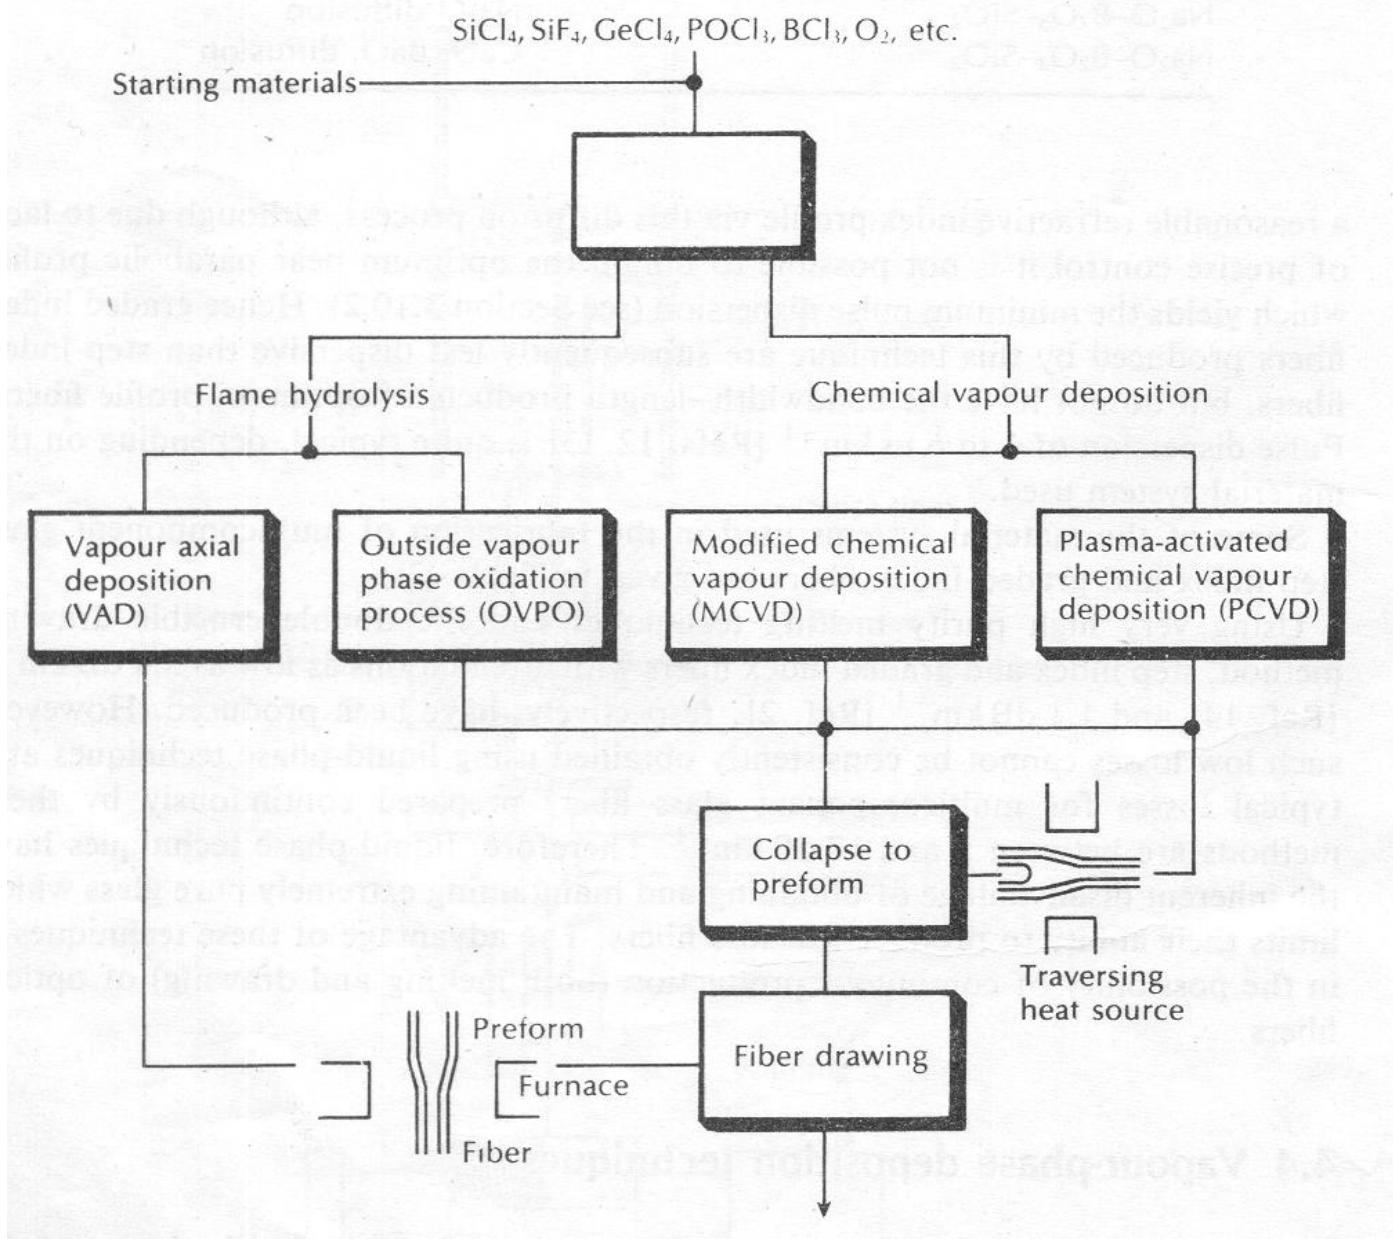

Different types of Commonly used OFs:

- Multimode step index fibers
- Multimode Graded index fibers
- Single mode fibers
- Plastic clad fibers
- All Plastic fibers

Multimode Step Index Fibers

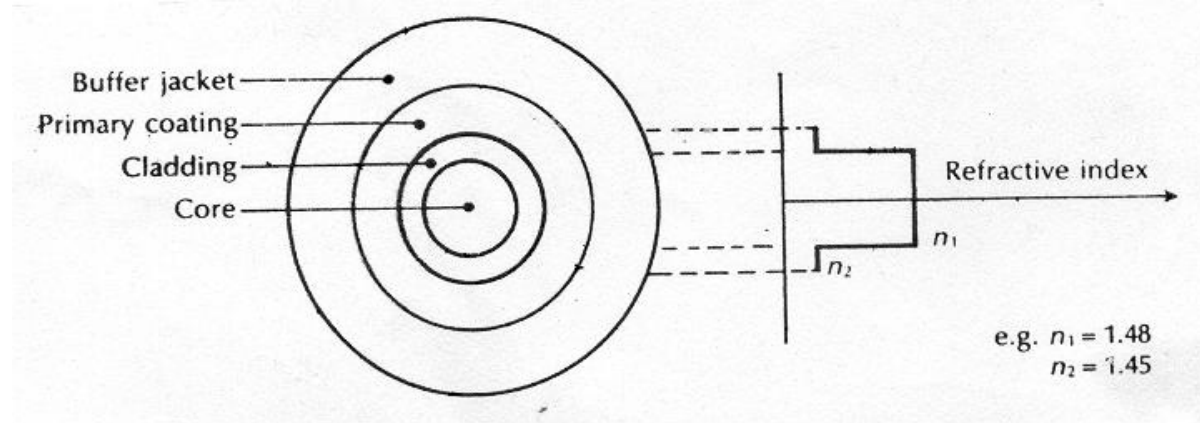

Typical structure for a glass multimode step index fiber.

Structure

Core Diameter	:	50 to 400 μm
Cladding Diameter	:	125 to 500 μm
Buffer Jacket	:	250 to 1000 μm
Numerical Aperture	:	0.16 to 0.5

- Fabricated from either from multicomponent glasses or doped silica.
- Have reasonably large core diameters and large NAs to facilitate efficient coupling to incoherent sources such as LEDs.

- Performance characteristics depends on the materials used and the methods of preparations
- Doped silica fibers exhibit the best performance



Attenuation : 2.6 to 50 dB/km at 850 nm,

- Limited by absorption or scattering.
- Wide variation in attenuation is due to differences between two preparation methods

Bandwidth : 6 to 50 MHz km.

Applications: Best suited for

- short-haul,
- Limited bandwidth and
- Relatively low cost applications.

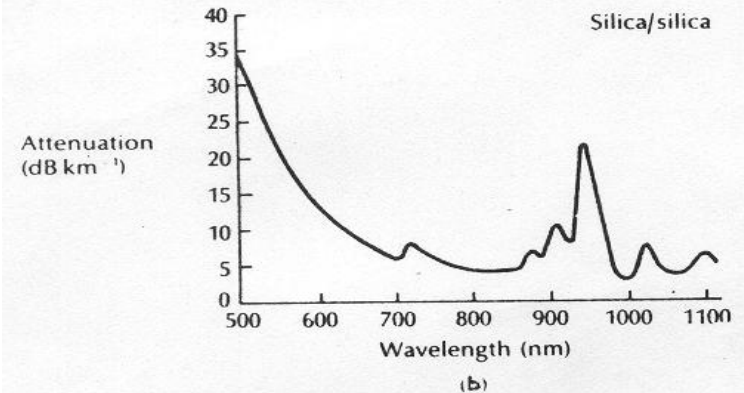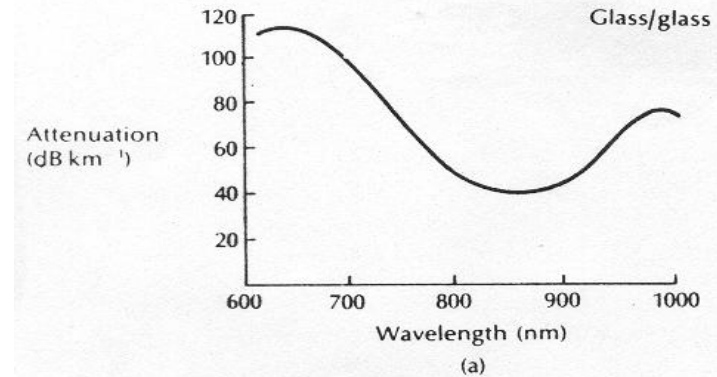


Attenuation Spectra for MMSIF:

(a) Multicomponent glass fibers

(b) doped silica fibers.

Multimode Graded Index Fibers

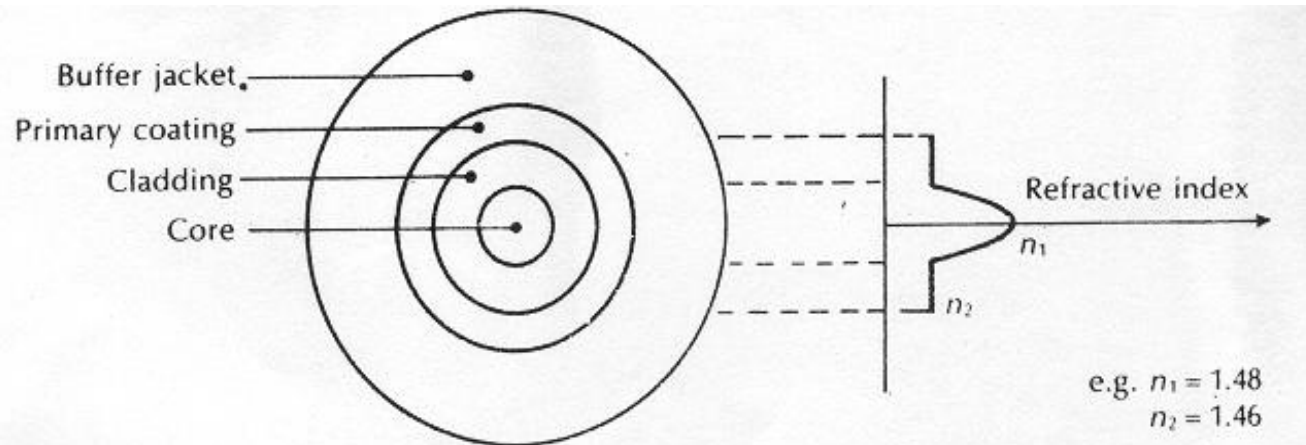

Typical structure for a glass multimode graded index fiber.

Structure

Core diameter	:	30 to 100 μm
Cladding diameter	:	100 to 150 μm
Buffer jacket diameter	:	250 to 1000 μm
Numerical aperture	:	0.2 to 0.3.

- Fabricated using MC glasses or Doped Silica
- Manufactured from materials with higher purity
- Better performance due to **index grading** and **lower attenuation**

Performance Characteristics

Attenuation:


- 2 to 10 dB km⁻¹ at a wavelength of 850nm with generally a scattering limit.
- Average losses of around 0.4 and 0.25 dB km⁻¹ can be obtained at wavelengths of 1.3 and 1.55 μm respectively.

Bandwidth: 300 MHz km to 3 GHz km.

Applications:

- Best suited for medium-haul, medium to high bandwidth applications using incoherent and coherent multimode sources (i.e. LEDs and injection lasers respectively).

Single-Mode Fibers

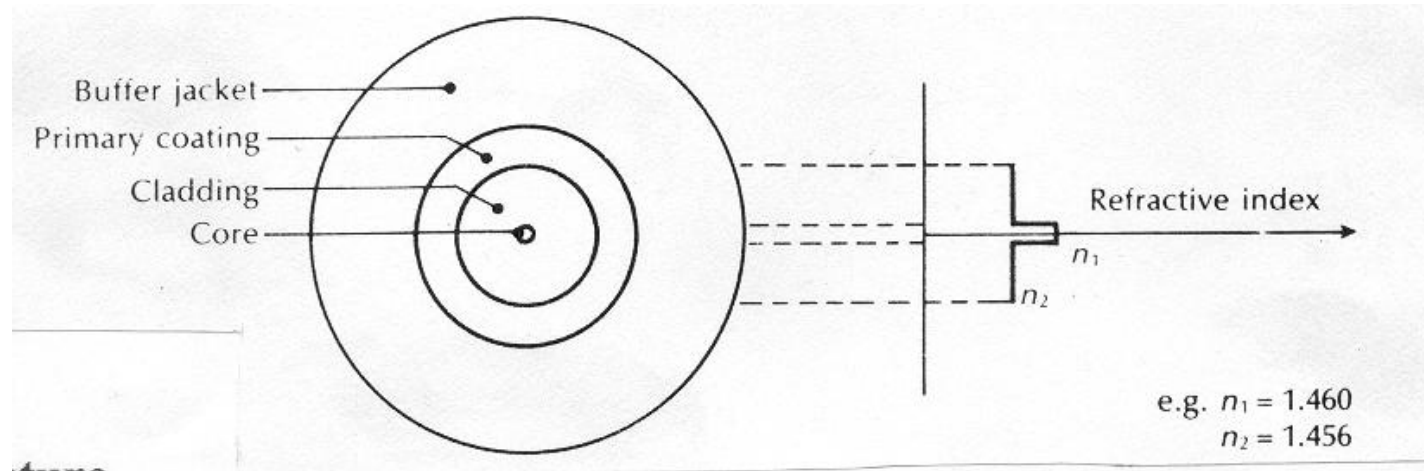

Typical structure for a silica single-mode step index fiber.

Structure

- Core diameter : 5 to 10 μm , typical around 8.5 μm
- Cladding diameter : generally 125 μm
- Buffer jacket diameter : 250 to 1000 μm
- Numerical aperture : 0.08 to 0.15, usually around 0.10.

Single-Mode Fibers

- Have either Step index or Graded index Profile
- GI Profiles
 - Provides dispersion modified SMF
 - Produce polarization maintaining fibers (PMF)
 - Expensive; Not utilized within OFC systems
- Commercially available SMFs are usually SI profile
- High quality fibers; Generally fabricated from doped silica (SCS)

Performance Characteristics

Attenuation:

- 2 to 5 dB km⁻¹ with a scattering limit at 850 nm.
- 0.35 and 0.21 dB km⁻¹ at 1310 and 1550 nm

Bandwidth:


- Greater than 500 MHz km. of 0.85 μm.
- More than 10 GHz km at a wavelength of 1.3 μm.

Applications:

Ideally suited for high bandwidth very long haul applications using single-mode injection laser sources.

Plastic Clad (PCS) Fibers

- MMF; either SI or GI profile

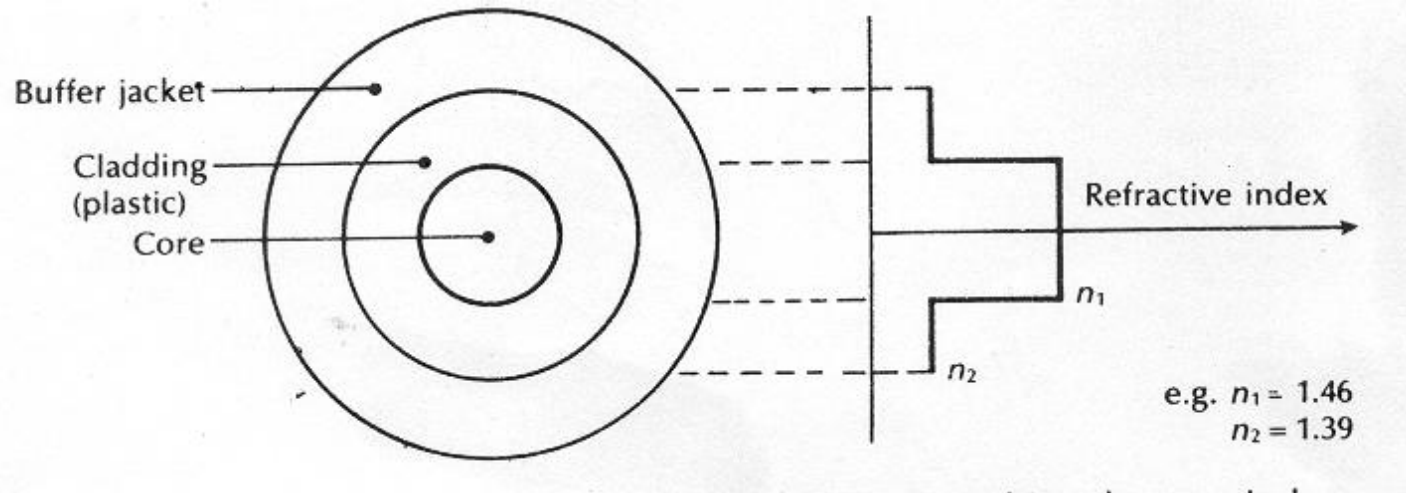

Typical structure for a plastic-clad silica multimode step index fiber.


Structure	<u>Step Index</u>	<u>Graded Index</u>
Core diameter :	100 to 500 μm	50 to 100 μm
Cladding diameter :	300 to 800 μm	125 to 150 μm
Buffer jacket diameter:	500 to 1000 μm	250 to 1000 μm
Numerical aperture :	0.2 to 0.5	0.2 to 0.3.

Performance Characteristics

Attenuation:	Step index	5 to 50 dB km ⁻¹
	Graded index	4 to 15 dB km ⁻¹

- PCS fibers exhibit lower radiation –induced losses than SCS.
 - **Have improved performance in certain environments**
- Generally cheaper than the corresponding glass fibers
 - **Have more limited performance characteristics**

All-Plastic Fibers (PCP)

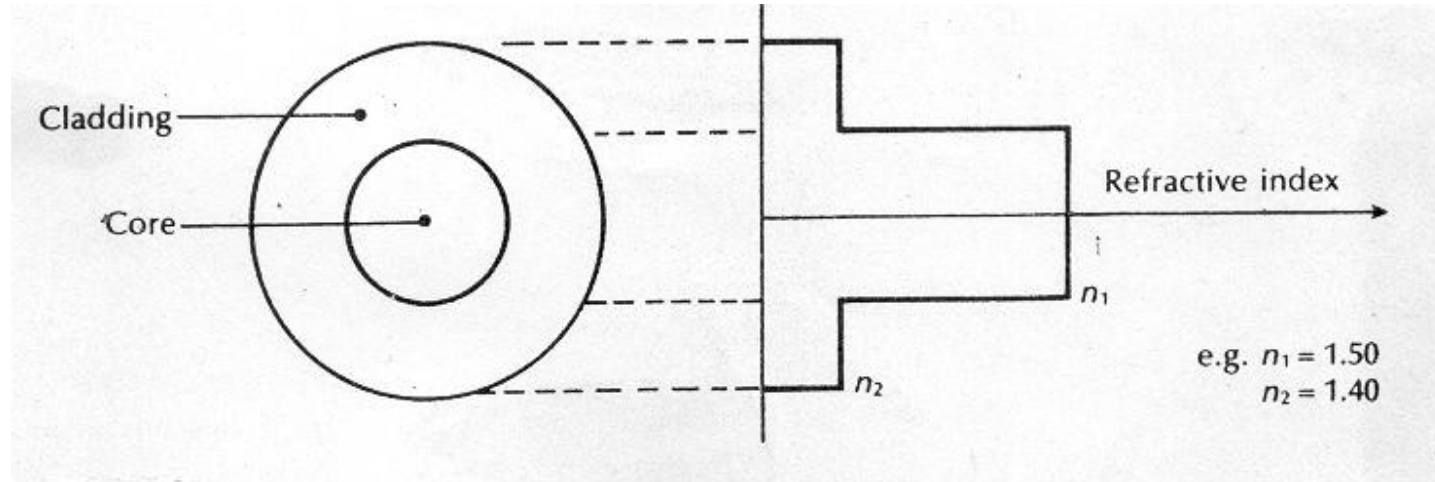

Typical structure for an all plastic fiber.

Structure

Core diameter	:	200 to 600 μm
Cladding diameter	:	450 to 1000 μm
Numerical aperture	:	0.5 to 0.6.

All-Plastic Fibers

- Exclusively of MMF SI type with large core and cladding diameters.
- Reduced requirement for buffer jacket, protection and strengthening
- Cheap and Easy to handle
- Limited use in communication applications
- Large NA:- Easy coupling to light sources
- Fabricated with Polymethyl methacrylate (PMMA) and Fluorinated polymer cladding

Performance characteristics

Attenuation : 50 to 1000 dB km⁻¹ at 650 nm

Bandwidth : Not usually specified as transmission is generally limited to tens of meters.

Applications : only be used for very short haul (i.e. 'in-house') low cost links.

- Fiber coupling and termination are relatively easy and do not require sophisticated techniques.

THANK YOU